

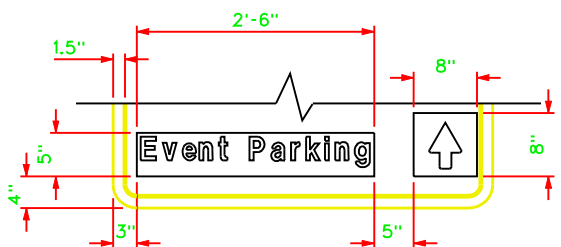
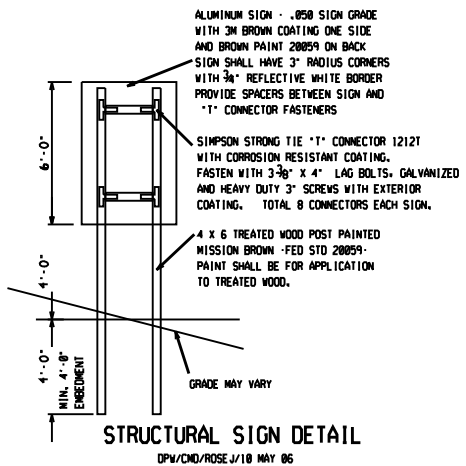
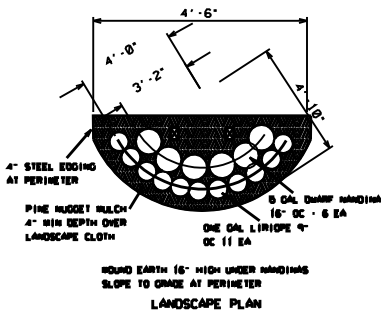


1.2 SIGN DETAIL
SCALE 2"=1'-0"

- NOTES:
1. THE 4" X 8" WOOD POST SHALL BE DRILLED TO MAKE THEM FRANGIBLE (WITH 1 1/2" HOLES, PERPENDICULAR TO THE DIRECTION OF TRAVEL, LOCATED 4" AND 18" ABOVE THE GROUND) THE DRILL HOLES IN THE CENTER OF THE SUPPORTS. REFER TO NCMAUTCD DRAWING 803.20.
 2. USE MATERIALS, FABRICATE AND ERECT SIGNS AND SUPPORTS THAT CONFORM TO THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES, UNLESS OTHERWISE INDICATED IN THESE PLANS.
 3. USE HIGH STRENGTH BOLTS, NUTS AND WASHERS THAT CONFORM TO A.S.T.M. A-325 AND THAT ARE GALVANIZED IN ACCORDANCE WITH A.S.T.M. A-153.
 4. ALL SIGNS WILL BE M3 BROWN WITH REFLECTIVE WHITE LETTERING AS INDICATED IN DETAIL, EXCEPT AS INDICATED FOR INSERTS AND INSERT AREA.
 5. ALL SIGNS WILL BE PROVIDED WITH AN INSERT AREA FOR SPECIAL EVENTS CONSISTING OF ONE "EVENT PARKING" WINDOW CUT (SEE DETAIL) AND ONE WINDOW CUT FOR AN ARROW.
 6. THE "EVENT PARKING" INSERT AREA WILL BE PAINTED WITH REFLECTIVE WHITE AND THE LETTERS ON THE INSERTS WILL BE M3 BROWN (SEE DETAIL).
 7. THE "EVENT PARKING" INSERTS BACK AREA WILL BE PAINTED WITH REFLECTIVE WHITE TO BE USED DURING NORMAL OPERATIONS TO COVER INSERT OPENINGS.







SIGN INSERT DETAIL
NTS



SIDE VIEW







DIRECTORATE OF PUBLIC WORKS FORT BRAGG, NORTH CAROLINA	
FORT BRAGG DIRECTIONAL SIGNS	
FORT BRAGG NORTH CAROLINA	
SCALE: DETAILS	DATE: 11 MAY 08
DESIGNED BY: J. J. JONES	CHECKED BY: J. J. JONES
DRAWN BY: J. J. JONES	DATE: 11 MAY 08
PW- 0000	SHEET 7 OF 7

DO NOT SCALE THIS DRAWING

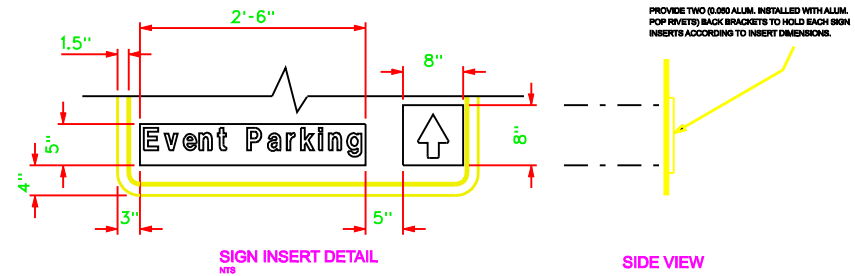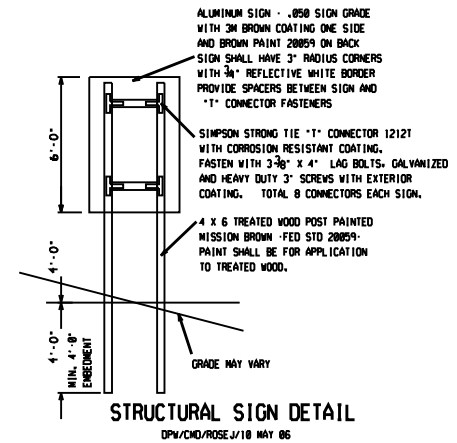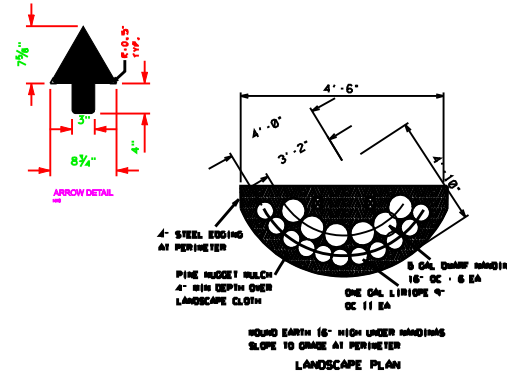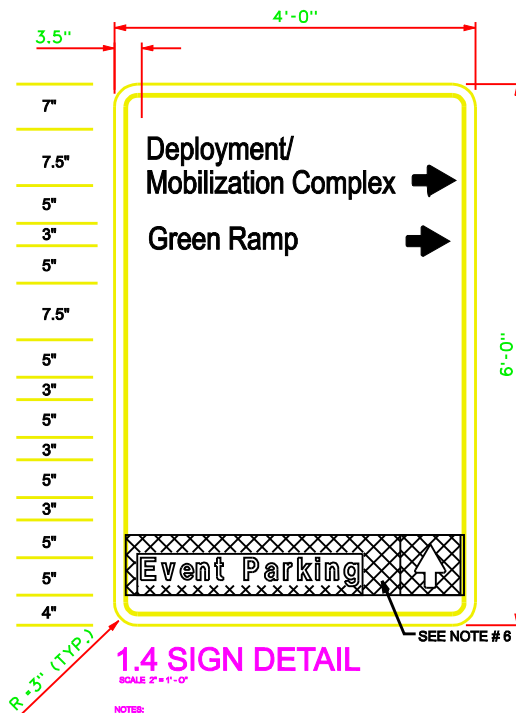

- NOTES:

THE 4"x8" WOOD POST SHALL BE NAILLED TO MAKE THEM FRAGILE. (WITH 1 "x6" HOLES, HORIZONTAL TO THE DIRECTION OF TRAVEL. LOCATED AT AND ABOVE THE GROUND) THE DRILL HOLES IN THE JOINTS OF THE SUPPORTS, REFER TO NOTED DRAWING 903-20.
ALL INSERTS SHALL BE PAINTED WHITE. ALL LETTERING ON THE INSERTS SHALL CONFORM TO THE REQUIREMENTS OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES, UNLESS OTHER INFORMATION IS INDICATED IN THESE PLANS.
ONE EIGHTH INCH THICK BOLTS, NUTS AND WASHERS THAT CONFORM TO A.S.T.M.A-305 AND THAT ARE GALVANIZED IN ACCORDANCE WITH A.S.T.M.-A-153
ALL SIGNS WILL BE BROWN WITH REFLECTIVE WHITE LETTERING AS INDICATED IN DETAIL, EXCEPT AS INDICATED FOR INSERTS AND INSERT AREA.
THE SIGNAGE SHALL HAVE AN INSERT AREA FOR SPECIAL EVENTS CONSISTING OF ONE "EVENT PARKING" WINDOW CLIP (SEE DETAIL) AND ONE WINDOW CLIP FOR AN ARROW.
THE "EVENT PARKING" INSERT AREA WILL BE PAINTED WITH REFLECTIVE WHITE AND THE LETTERS ON THE INSERTS WILL BE BROWN (SEE DETAIL).
THE "EVENT PARKING" INSERTS BACKWARDS WILL BE PAINTED WITH REFLECTIVE WHITE TO BE USED DURING RACIAL OPERATIONS TO COVER

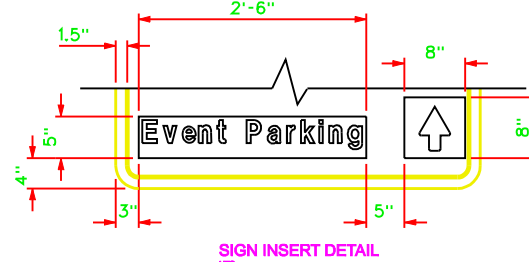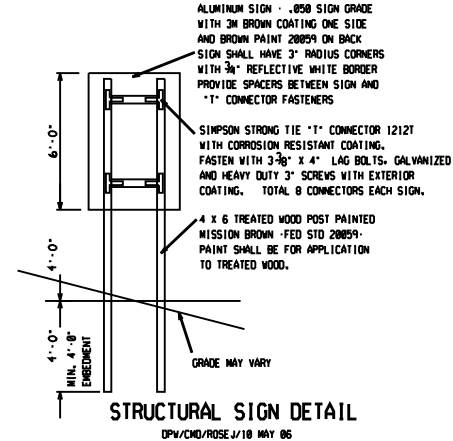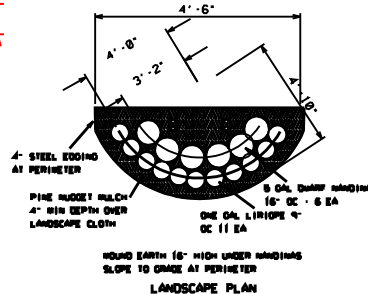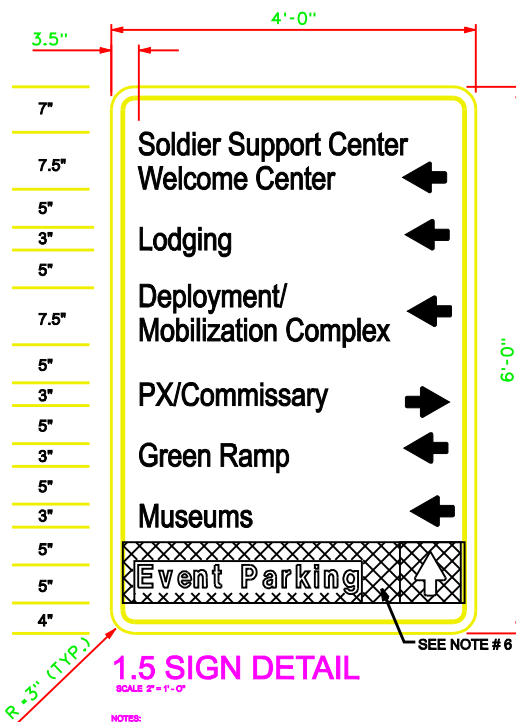

DIRECTORATE OF PUBLIC WORKS FORT BRAGG, NORTH CAROLINA	
FORT BRAGG DIRECTIONAL SIGNS	
FORT BRAGG NORTH CAROLINA	
DATE 11 MAY 06	BY J. J. ROSE
DATE 11 MAY 06	BY J. J. ROSE
PW- 0000	SHEET 7 OF 7